

# EUROROOF SELF-ADHESIVE CAP SHEET




Euroroof Self-Adhesive High Performance Roofing Systems comprise a premium self-adhesive reinforced SBS polymer modified bituminous waterproofing membrane, underlays, insulation boards and air and vapour control layers (AVCL). Specifically developed to meet the need for improved safety by using flame-free installation methods and removing the need for a naked flame. The system is fully adaptable to meet the individual requirements of every project for use across all building sectors in both refurbishment and new-build roofing and waterproofing projects.

## Where to Specify

- New Build
- Refurbishment
- Cold roofs
- Warm roofs (all roofing insulations)
- Overlay of existing waterproofing systems
- Compatible with all conventional roofing substrates

## Durability

When installed on stable substrates and regularly maintained, the system will have a life in excess of 25 years.

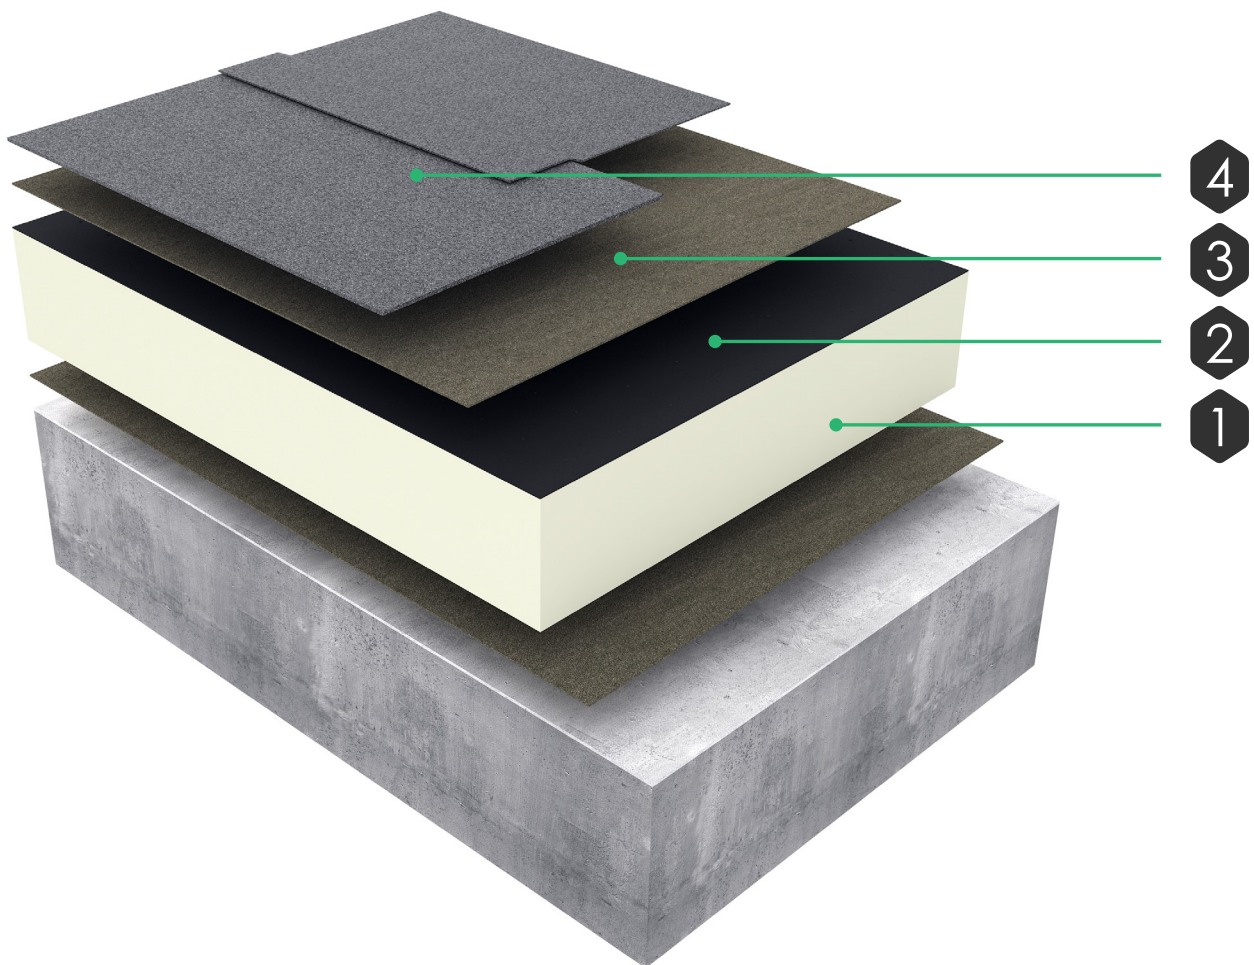


Typical Assembly	
4	Euroroof Self-Adhesive Cap Sheet
	Euroroof SA Primer
3	Euroroof Self-Adhesive Underlay
	Euroroof SA Primer
2	PIR Insulation (type GTF) or Class A fire rated alternative
	PU Insulation Adhesive
1	Euroroof Self-Adhesive AVCL
	Euroroof SA Primer

# EUROROOF SELF-ADHESIVE CAP SHEET



**ALUMASC**  
ROOFING


## Other Common System Types

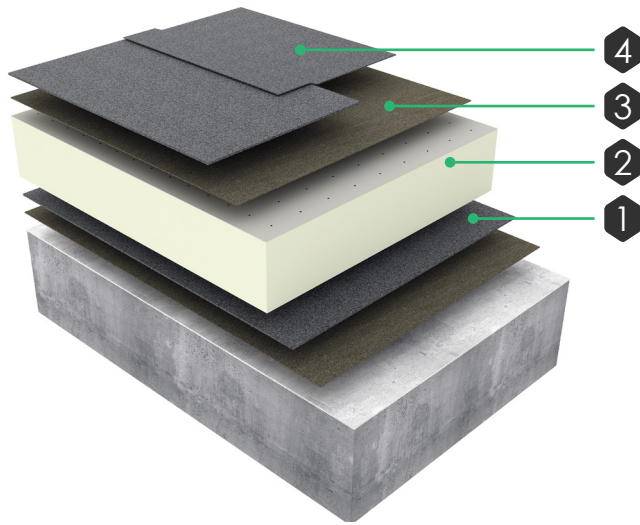

### Insulated Overlay of Existing Waterproofing

4	Euroroof Self-Adhesive Cap Sheet
	Euroroof SA Primer
3	Euroroof Self-Adhesive Underlay
	Euroroof SA Primer
2	PIR Insulation (type GTF) or Class A fire rated alternative
	PU Insulation Adhesive
1	Existing waterproofing

**NB.** Air & Vapour Control Layer may be required, subject to condition of the existing waterproofing.

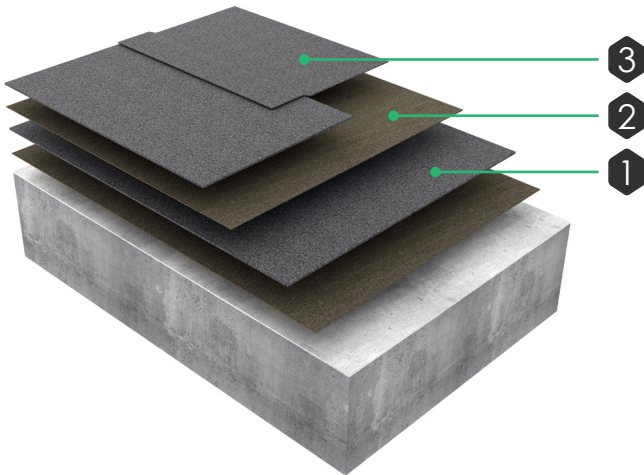

### Cold Overlay of Existing Waterproofing

3	Euroroof Self-Adhesive Cap Sheet
	Euroroof SA Primer
2	Euroroof Self-Adhesive Underlay
	Euroroof SA Primer
1	Existing waterproofing

## Approvals

- BBA Roofing Membranes Certificate No. 24/7275
- Fire classification of **B<sub>roof</sub>(t4)** in accordance with BS EN 13501-5



## Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 25 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover product, workmanship, and design.

## Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.