

DERBIGUM NT CAP SHEET



ALUMASC
ROOFING

Derbigum NT High Performance Roofing Systems comprise an ecological reinforced modified bituminous waterproofing membrane, underlays, insulation boards and air and vapour control layers (AVCL). Derbigum has a proven track record since 1967 and is subject to the highest levels of certification and testing. Using a variety of installation methods and build-ups systems are designed to meet the individual requirements of every project for use across all building sectors in both refurbishment and new-build roofing and waterproofing projects.

✓ Where to Specify


- New Build
- Refurbishment
- Cold roofs
- Warm roofs (all roofing insulations)
- Overlay of existing waterproofing systems
- Compatible with all conventional roofing substrates

✓ Durability

When installed on stable substrates and regularly maintained, the system will have a life in excess of 40 years.

✓ Environmental Benefits

Derbigum NT is manufactured using 30% of recycled materials. The specific formula blended with polymers gives exceptional, durable characteristics and is 100% recyclable at the end of its life.

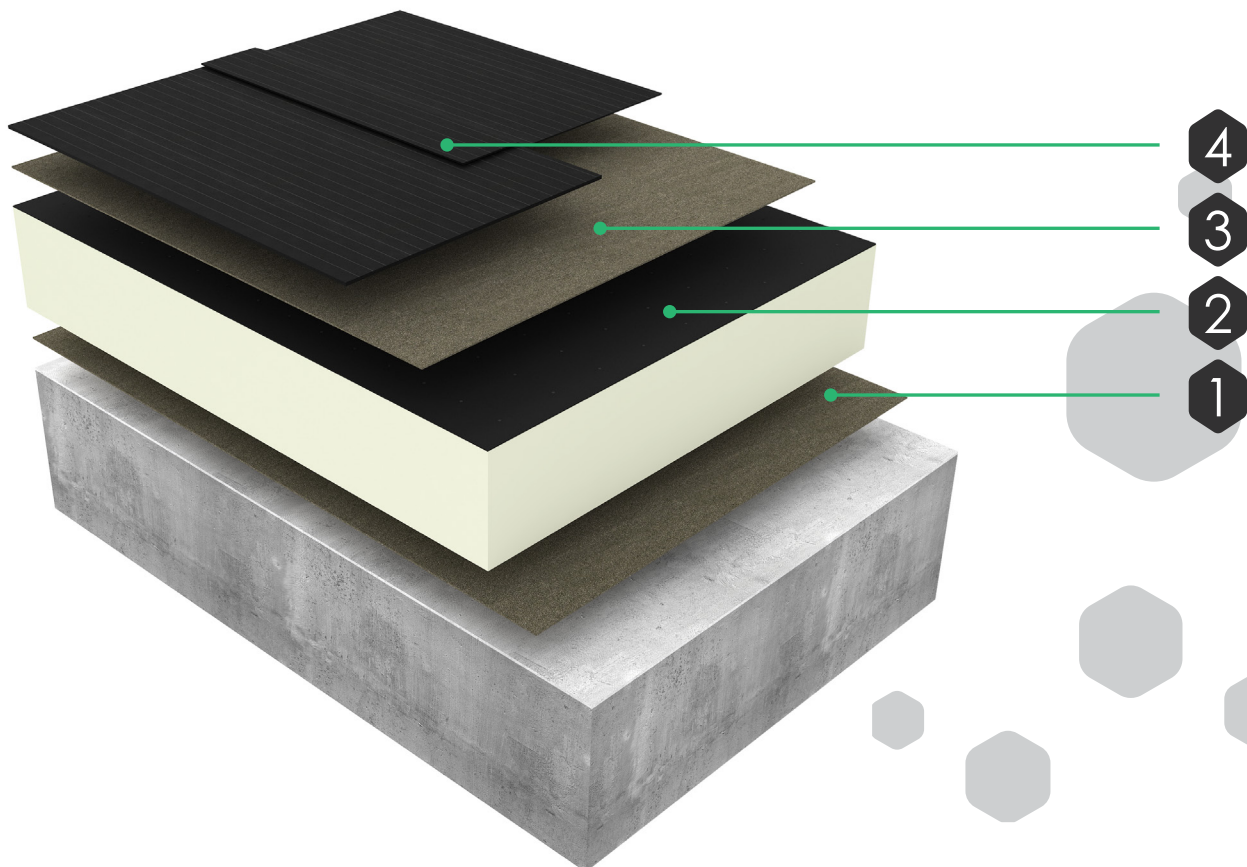

	Typical Torch-On Assembly
4	Derbigum NT*
3	Torch-On Underlay
2	PIR Insulation (type BGT) or Class A fire rated alternative PU Insulation Adhesive
1	Torch-On AVCL Alumasc Bitumen Primer

	Typical Safe2Torch Assembly
4	Derbigum NT*
3	Self-Adhesive Underlay Eurorof SA Primer
2	PIR Insulation (type GTF) or Class A fire rated alternative PU Insulation Adhesive
1	Self-Adhesive AVCL Eurorof SA Primer

*System layer variants are also available.


DERBIGUM NT CAP SHEET

Other Common System Types



ALUMASC
ROOFING


Insulated Overlay of Existing Waterproofing

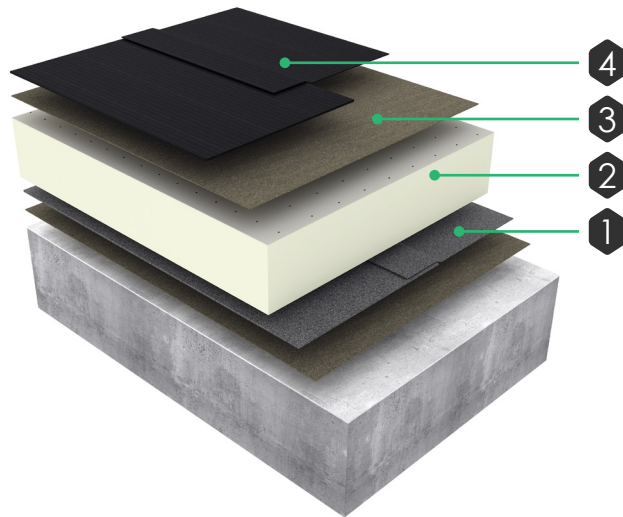

4	Derbigum NT
3	Torch-On/Self-Adhesive Underlay
2	PIR Insulation or Class A fire rated alternative
	PU Insulation Adhesive
1	Existing waterproofing

NB. Air & Vapour Control Layer may be required, subject to condition of the existing waterproofing.

Cold Overlay of Existing Waterproofing

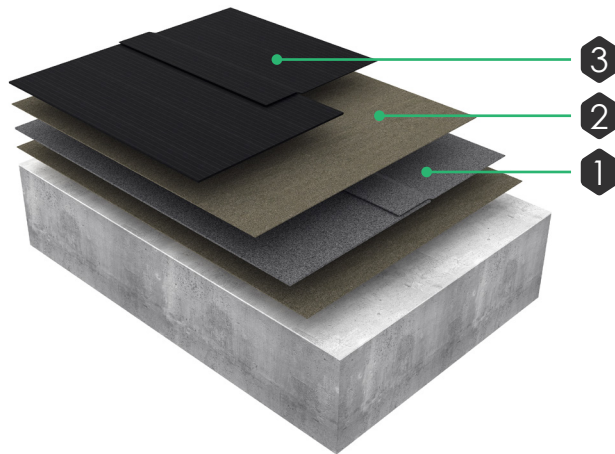

3	Derbigum NT
2	Torch-On/Self-Adhesive Underlay
	Primer, type according to AVCL
1	Existing waterproofing

Approvals

- BBA Roofing Systems Certificate No. 18/5563
- ATG Technical Approval Certificate No. ATG 3163
- Fire classification of **B_{roof}(t4)** in accordance with BS EN 13501-5



Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 35 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover product, workmanship, and design.

Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.