

AIRTILE SLIM


A Modern Pantile Profile



ALUMASC
ROOFING

✓ Where to Specify

- Educational Buildings
- Social Housing
- Commercial Buildings
- Flat to Pitch
- Community Centres
- Modular Buildings
- Vertical Cladding

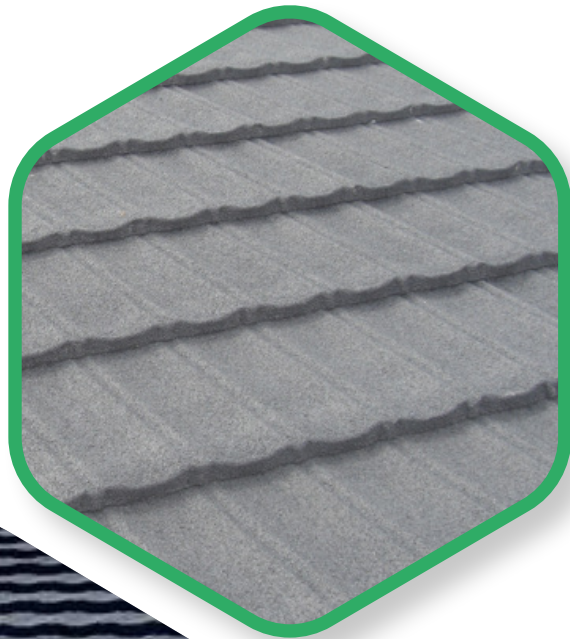

AIRTILE SLIM

A Modern Pantile Profile



ALUMASC
ROOFING

Advantages

- British made
- Designed to give a traditional slate appearance
- Lightweight
- Low pitch
- Good vandal resistance (0.9mm steel base)
- Quick installation / cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- 60+ Year life expectancy
- Guaranteed for 40-years against weather penetration


Technical Data

- Minimum pitch 10°
- Maximum pitch 90°
- Overall width: 1308mm
- Cover width: 1248mm
- Side lap: 60mm
- Step: 22mm
- Batten gauge (0.45mm): 370mm
- Batten gauge (0.9mm): 368mm
- Individual slate width: 156mm
- Roof cover per slate panel: 0.46m²
- Tile panels per m²: 2.18
- Steel base: 0.45mm & 0.9mm
- Weight as laid per m²: 7kg & 11kg
- Fire resistance: AA classification equal to traditional roof tiles and slates

Approvals

- BBA Certificate No. 02/3917
- Manufactured using ISO 9001 approved materials
- ISO 14001

Colours Available



Titanium Grey




Bramble Brown




Rustic Brown




Rustic Terracotta



Moss Green



Tartan Green

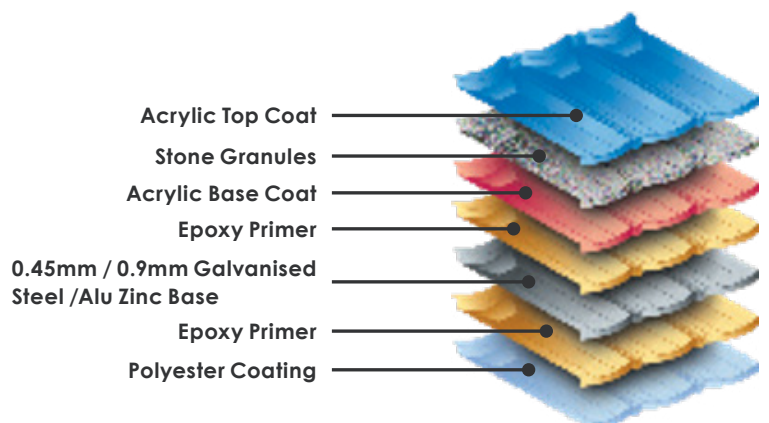

Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.