

AIRTILE LITESLATE

Authentic, Sustainable, Lightweight Slate




ALUMASC
ROOFING



Where to Specify

- Educational Buildings
- Commercial Buildings
- Flat to Pitch
- Community Centres
- Vertical Cladding

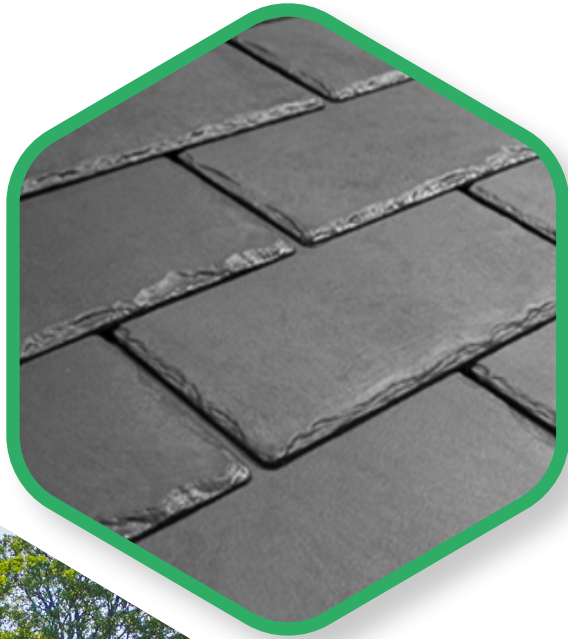

AIRTILE LITESLATE

Authentic, Sustainable, Lightweight Slate



ALUMASC
ROOFING



Technical Data

- Minimum pitch 12°
- Maximum pitch 90°
- Weight: 0.6kg
- Overall width: 297mm
- Overall height: 445mm
- Batten gauge: 152-191mm
- Roof cover per slate: 0.06m²
- Slate per m²: 18-22
- Weight as laid per m²: 12kg
- Ridge: 5.5 to 6.5 per linear metre
- Hip: 5.5 to 6.5 per linear metre
- Material: recyclable blend of Polypropylene & Limestone
- Fire resistance: BS476 Part 3



Advantages

- British made
- Designed to give a traditional slate appearance
- Lightweight
- Low pitch
- Does not break or crack
- Quick installation / cost effective
- Virtually maintenance free
- Extensive range of accessories and flashings available
- Fully dry-fixed
- Guaranteed for 40-years against weather penetration



Approvals

- BBA Certificate No. 02/3917
- Manufactured using ISO 9001 approved materials
- ISO 14001



Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 50 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service.



Colours Available



Slate



Ash



Oak



Sunshine



Sunset




Amethyst



Charcoal

Pitch finder →

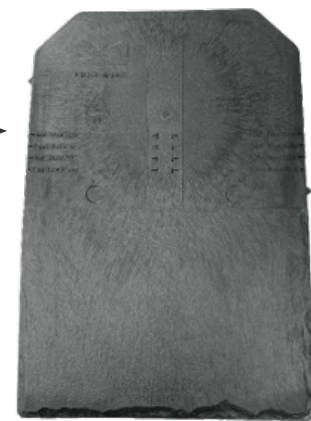

Authentic slate appearance

↑
Riven front edge



Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.



+44 (0)1744 648400



technical@alumascroofing.com



www.alumascroofing.com

Ref: SSDS-AIR007 Issued: 07/03/25