

# Product Datasheet

## Aluply PVC Seam Profile

Sheet No: PDS-AP010  
 Issued: Dec 2025  
 Pages: 1 of 1

### Description

Aluply PVC Seam Profiles simulate the appearance of standing seam and lead roll roofs. The flexibility of the profiles allows for them to be installed on slopes, valleys and contours.

### Colour

RAL 7016 Anthracite Grey.


Colour is always produced to provide maximum consistency, however sometimes batch/shading differences may occur.

### Application

Hot-air welded directly to the completed roof surface. The pattern of the profiles can be adapted to suit a variety of designs and architectural requirements.

### Product Data

Material	Flexible PVC
Height (a) (mm)	25
Width Seam (b) (mm)	15
Total Width C (mm)	35
Length (y) (m)	3
Thickness (mm)	2.2
Weight (g/lm)	240
Pack Content	10 lengths

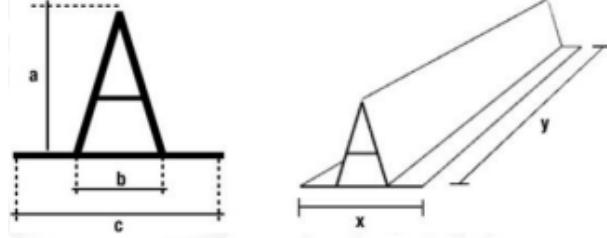

### Fire Performance

Please refer to the Alumasc certification to confirm the full range of approved insulation types, attachment methods, and substrates covered.

Reaction to Fire: Class F in accordance with EN 13501-1.

### Storage

Store dry. Packs should be laid flat in the original packing where possible; do not stack in cross form or under pressure.

### Health & Safety

Safety Data Sheets are available upon request and can also be downloaded directly from [www.alumascroofing.com](http://www.alumascroofing.com).

### Technical Support

Technical advice is available from Alumasc Technical Services at:

Telephone: +44 (0)1744 648400

Email: [technical@alumascroofing.com](mailto:technical@alumascroofing.com)

The company pursues a policy of constant product development and information contained in this publication is therefore subject to change without notice. The customer is responsible for ensuring that each product is fit for its intended purpose and that the conditions for use are suitable. All quoted data is nominal and subject to production tolerances.