

EUROROOF TORCH-ON CAP SHEET




Eurorooftorch-On High Performance Roofing Systems comprise a premium torch applied reinforced APP polymer modified bituminous waterproofing membrane, underlays, insulation boards and air and vapour control layers (AVCL). Subject to the highest levels of certification and testing the system is fully adaptable to meet the individual requirements of every project for use across all building sectors in both refurbishment and new-build roofing and waterproofing projects.

Where to Specify

- New Build
- Refurbishment
- Cold roofs
- Warm roofs (all roofing insulations)
- Overlay of existing waterproofing systems
- Compatible with all conventional roofing substrates

Durability

BBA Certified - When installed on stable substrates and regularly maintained, the system will have a life in excess of 25 years.

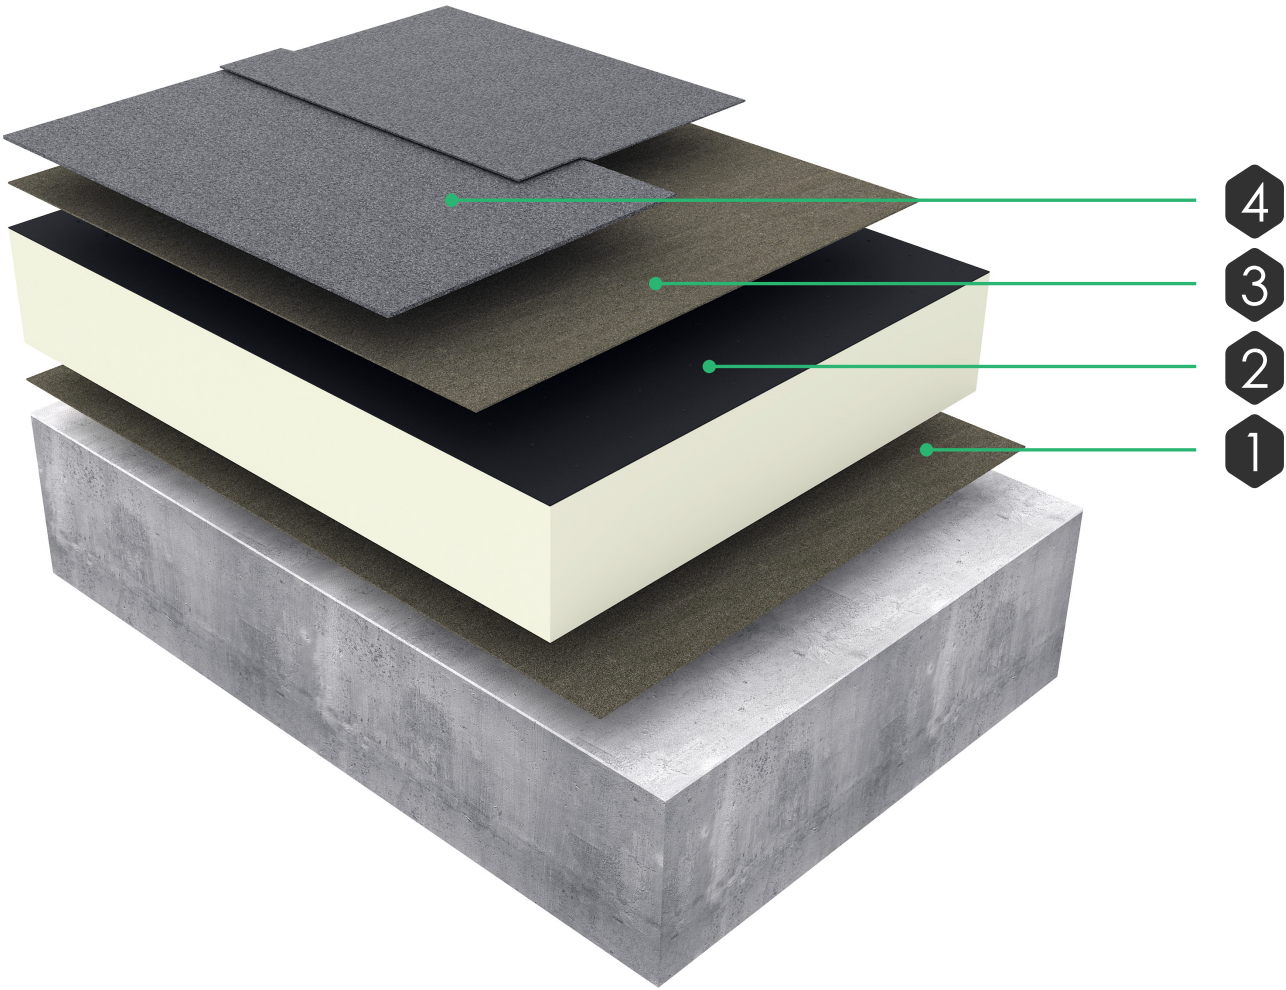


	Typical Torch-On Assembly
4	Eurorooftorch-On Cap Sheet*
3	Eurorooftorch-On Underlay
2	PIR Insulation (type BGT) or Class A fire rated alternative
	PU Insulation Adhesive
1	Eurorooftorch-On AVCL
	Alumasc Bitumen Primer

	Typical Safe2Torch Assembly
4	Eurorooftorch-On Cap Sheet*
3	Eurorooft Self-Adhesive Underlay
	Eurorooft SA Primer
2	PIR Insulation (type GTF) or Class A fire rated alternative
	PU Insulation Adhesive
1	Eurorooft Self-Adhesive AVCL
	Eurorooft SA Primer

*System layer variants are also available.

EUROROOF TORCH-ON CAP SHEET


Other Common System Types

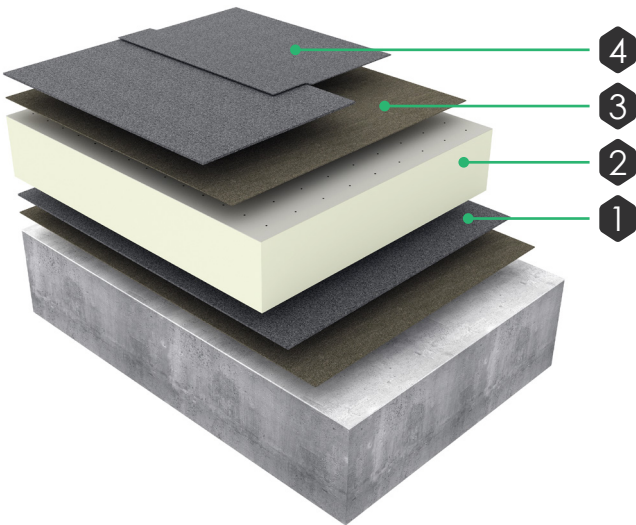

Insulated Overlay of Existing Waterproofing


4	Eurorooftorch-On Cap Sheet
3	Torch-On/Self-Adhesive Underlay
2	PIR Insulation or Class A fire rated alternative
	PU Insulation Adhesive
1	Existing waterproofing

NB. Air & Vapour Control Layer may be required, subject to condition of the existing waterproofing.

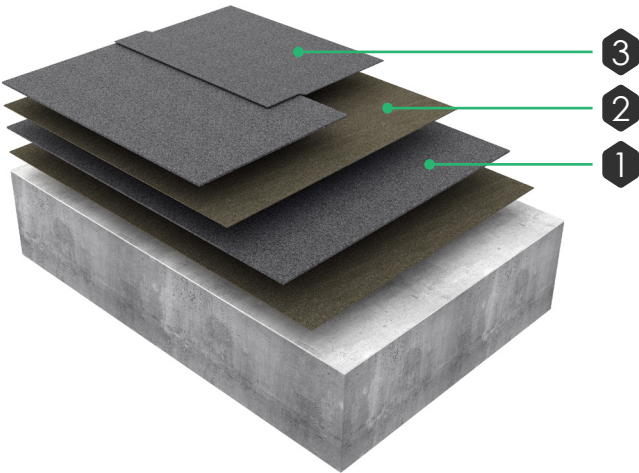

Cold Overlay of Existing Waterproofing

3	Eurorooftorch-On Cap Sheet
2	Torch-On/Self-Adhesive Underlay
	Primer, type according to application method
1	Existing waterproofing

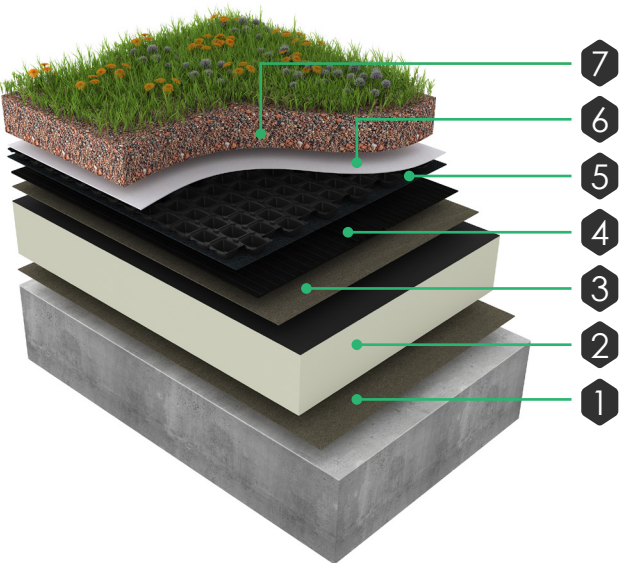

Warm Roof with Green Roof

7	Blackdown Specialist Substrate
6	Blackdown Drainage Layer & Filter Sheet
5	Blackdown Moisture Retention Fleece
4	Eurorooftorch-On AR
3	Torch-On/Self-Adhesive Underlay
2	PIR Insulation or Class A fire rated alternative
	PU Insulation Adhesive
1	Air & Vapour Control Layer, type according to the substrate
	Alumasc Primer, type according to AVCL

EUROROOF TORCH-ON CAP SHEET



ALUMASC
ROOFING



Approvals

- BBA Roofing Membranes Certificate No. 24/7275
- Fire classification of **B_{roof} (t4)** in accordance with BS EN 13501-5



Warranties

Alumasc offers a comprehensive range of single-source warranty options for up to 25 Years. Installed exclusively by Registered Contractors and underpinned by Alumasc's extensive project support service, Alumasc warranties cover product, workmanship, and design.



Technical Support

Alumasc Technical Services can advise on all aspects of product selection, specification and integration of Alumasc systems into any building design.



+44 (0)1744 648400



technical@alumascroofing.com



www.alumascroofing.com

Ref: SSDS-RBM004 Issued:01/07/26